

Features

- Frequency: 14-18GHz
- Phase Shift Accuracy RMS: 1.8 °
- Insertion Loss: 9.6dB (Typ.)
- Amplitude Variation: 1.3dB
- Impedance: 50Ω
- Die Size: 3.45 x 1.37 x 0.1 mm

Typical Applications


- Test Instrumentation
- Microwave Radio & VSAT
- Military & Space
- Telecom Infrastructure
- Fiber Optics

Electrical Specifications
TA = +25°C


Parameters	Min.	Typ.	Max.	Units
Frequency	14-18			GHz
Insertion Loss		9.6	10	dB
Phase Shift Accuracy RMS		1.8		°
Amplitude Variation		1.3		dB
Input Return Loss	15	21	-	dB
Output Return Loss	14	20	-	dB
Switching Speed		20		ns




Insertion Loss vs. Frequency

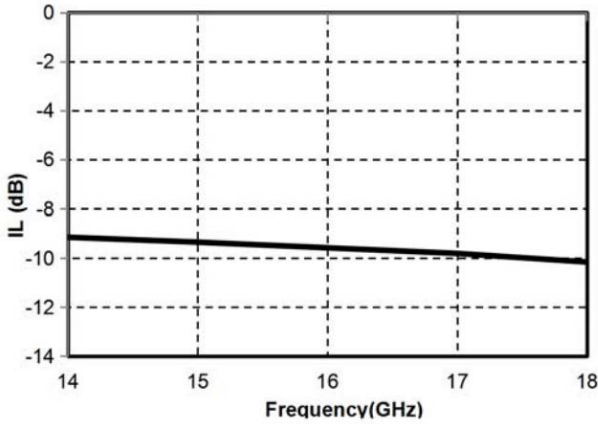


Phase Shift Accuracy (RMS) vs. Frequency

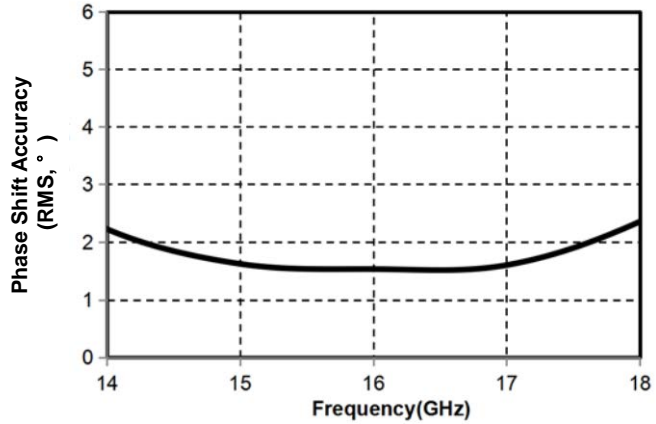


Phase Shift Accuracy vs. Frequency

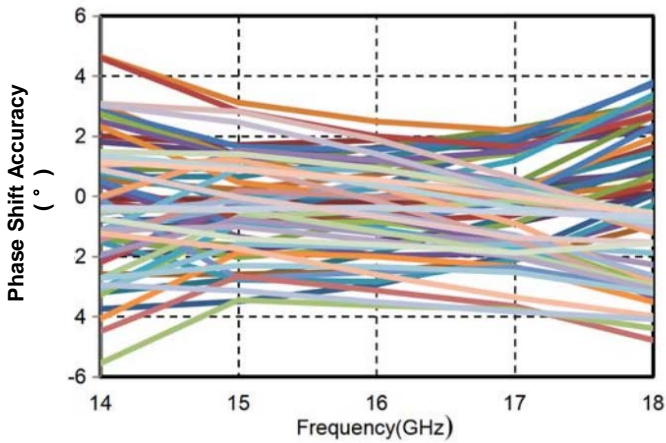


Phase Shift Value vs. Frequency

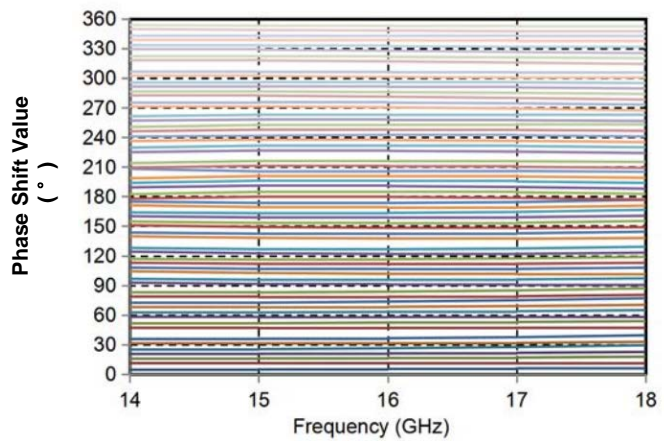

Input Return Loss vs. Frequency

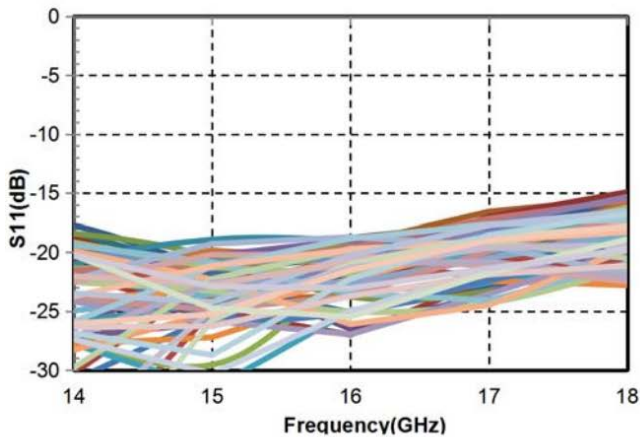


Output Return Loss vs. Frequency

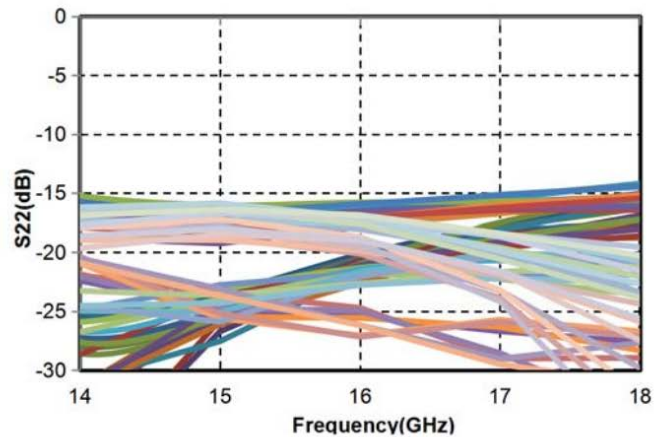




Amplitude Variation

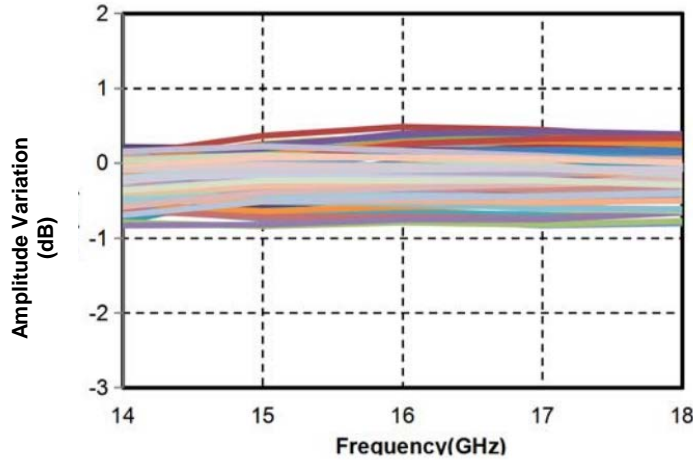

Outline Drawing:

All Dimensions in um

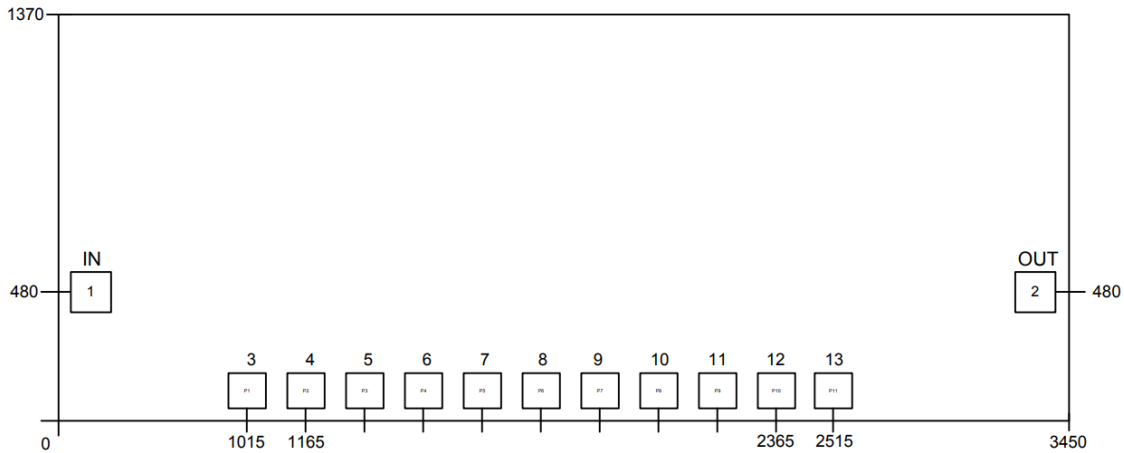

Pad Description


PAD	Function	Description
1	RF IN	RF Input Port
2	RF OUT	RF Output Port
3-13	CTRL	Control Port
GND	GND	Die bottom must be connected to RF/DC ground



Truth Table

Phase	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11
0	0	-5	-5	0	-5	0	0	-5	-5	-5	0
5.625	0	-5	-5	0	-5	0	0	-5	0	-5	0
11.25	0	-5	-5	0	0	-5	0	-5	-5	-5	0
22.5	0	-5	0	-5	-5	0	0	-5	-5	-5	0
45	-5	0	-5	0	-5	0	0	-5	-5	-5	0
90	0	-5	-5	0	-5	0	-5	0	-5	-5	0
180	0	-5	-5	0	-5	0	0	-5	-5	0	-5
354.375	-5	0	0	-5	0	-5	-5	0	0	0	-5

Assembly Drawing

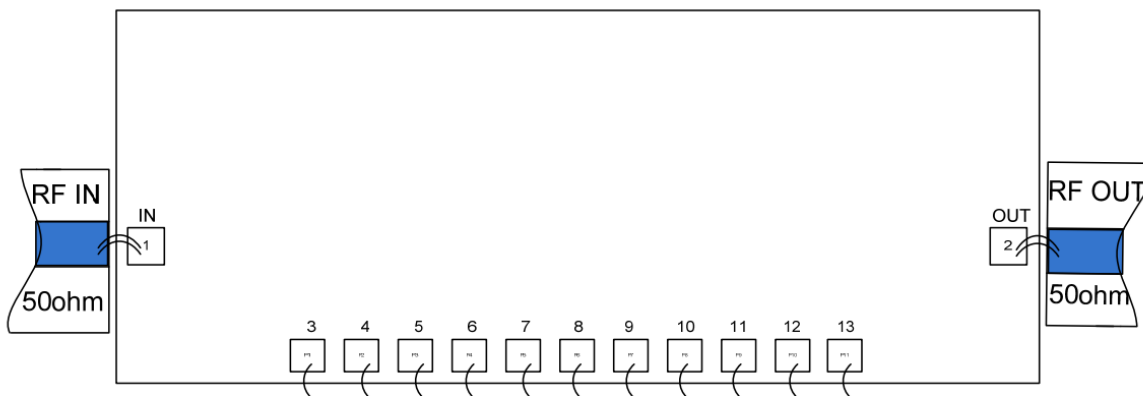

Notes:

1. Die thickness: 100um
2. Typical bond pad is 100*100 μm²
3. Bond pad metalization: Gold
4. Backside metalization: Gold
5. Backside of the die (GND)
6. No connection required for unlabeled bond pads

Maximum Ratings:

1. RF input power: +23dBm
2. Control voltage range: -8V~0.5V
3. Storage temperature: -65°C to +150°C
4. Operating temperature: -55°C to +85°C