


**Features**

- Frequency: 6-18GHz
- Insertion Loss: 0.5dB
- Input/Output: 50Ω matched
- Die Size: 1.8 x 1.2 x 0.1 mm

**Functional Block Diagram**

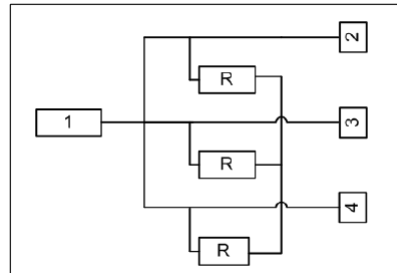


**Electrical Specifications**


TA = +25°C

Parameters	Min.	Typ.	Max.	Units
Frequency	6-18			GHz
Insertion Loss	0.4	0.5	0.8	dB
Flatness		±0.2		dB
Isolation	18	25		dB
Input Return Loss	12	15		dB
Output Return Loss	17	24		dB


**Insertion Loss**

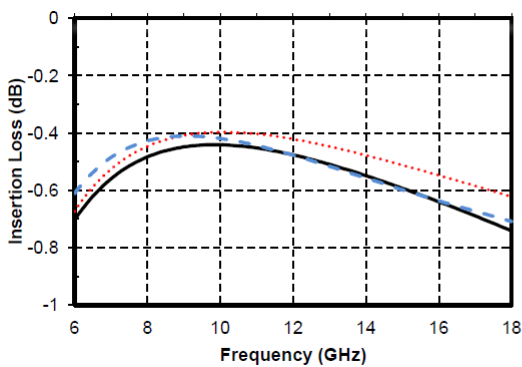


**Isolation**

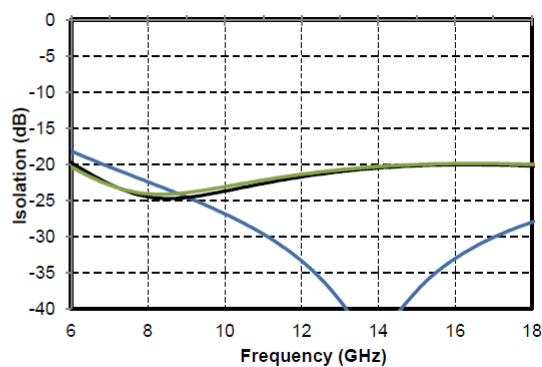

**Input Return Loss**

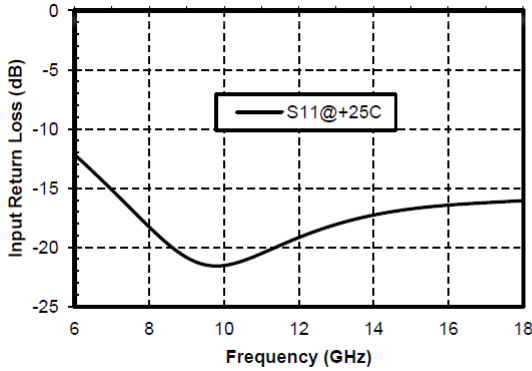


**Output Return Loss**

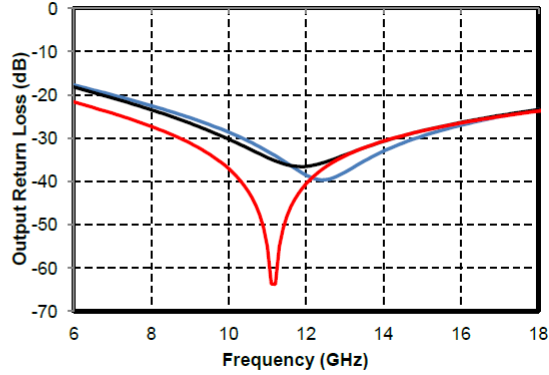


**Outline Drawing**

All Dimensions in um

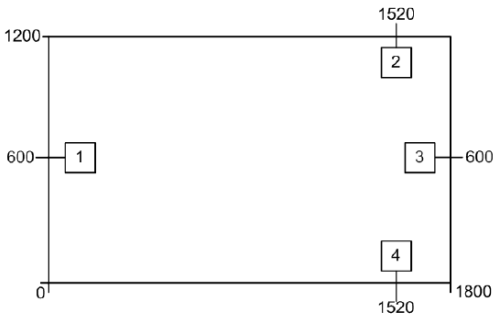

**Assembly Drawing**

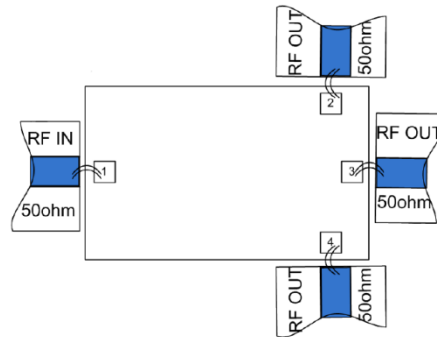

**Pad Description**

Pad	Function	Description
1	RF IN	RF Input Port
2,3,4	RF OUT	RF Output Port
Die bottom	GND	Die bottom must be connected to RF/DC ground.

**Maximum Ratings:**

1. Maximum input power: +40dBm
2. Operating temperature: -55°C to +85°C
3. Storage temperature: -65°C to +150°C