




### Features

- Noise Figure: 0.9dB
- Gain: 26dB
- P1dB: +13dBm
- Biasing: +5V @ 26 mA
- Impedance: 50Ω
- Die Size: 2.3 x 1.3 x 0.1 mm

### Functional Block Diagram

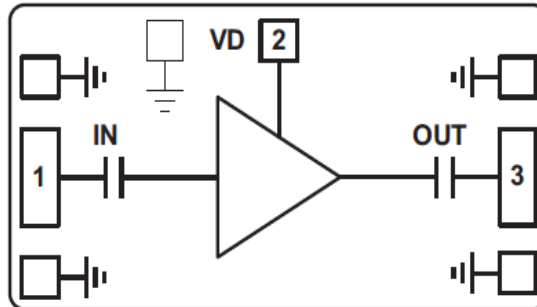

### Typical Applications

- Test Instrumentation
- Microwave Radio & VSAT
- Military & Space
- Telecom Infrastructure
- Fiber Optics


### Electrical Specifications

TA = +25°C, Vdd = +5V Idd = 26mA


Parameters	Min.	Typ.	Max.	Units
Frequency		2 - 6		GHz
Gain		26		dB
Gain Flatness		±0.5		dB
Input Return Loss		10		dB
Output Return Loss		15		dB
Output 1dB Compression (P1dB)		13		dBm
Saturated Output Power (Psat)		15.5		dBm
Output Third Order Intercept (IP3)		21.5		dBm
Noise Figure		0.9		dB
Current	10	26	46	mA




### Gain

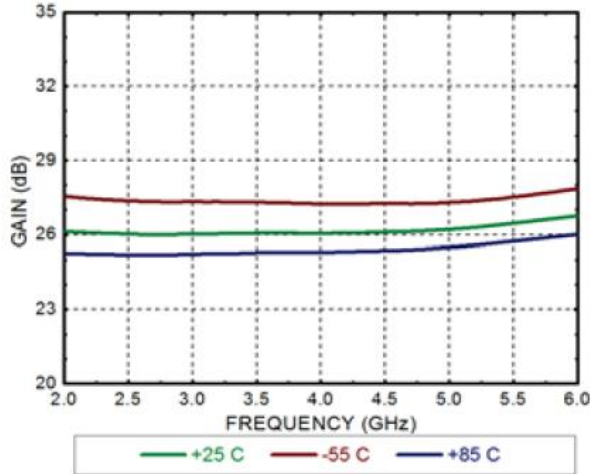


### Return Loss

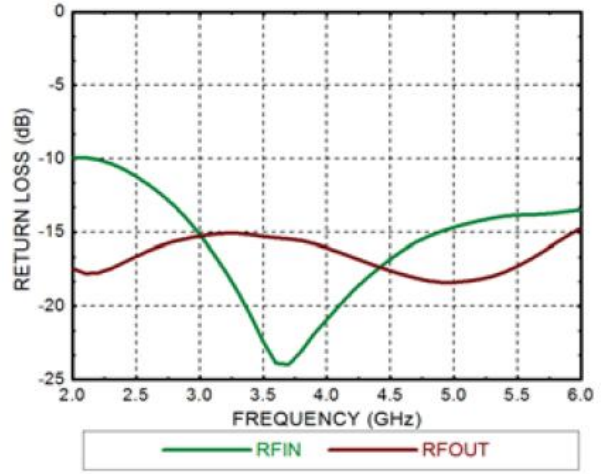

### Noise Figure

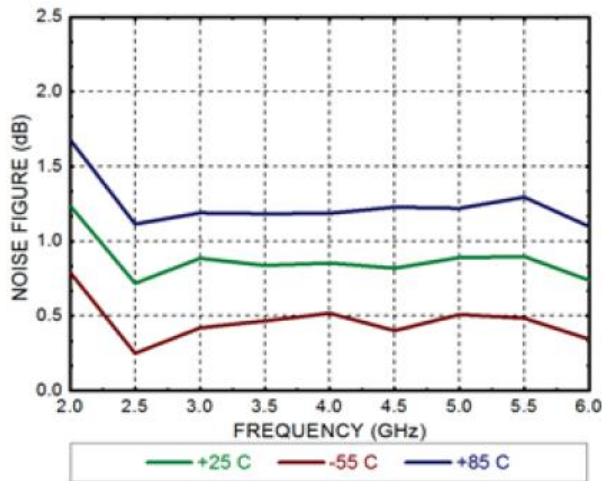


### Output Power $P_{1dB}$

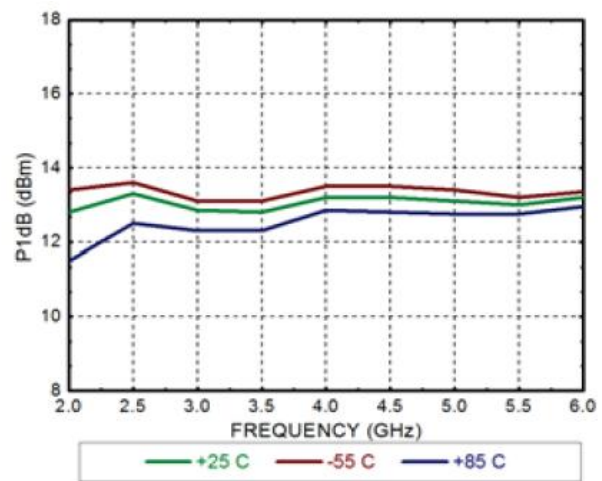



### Outline Drawing:

All Dimensions in mm

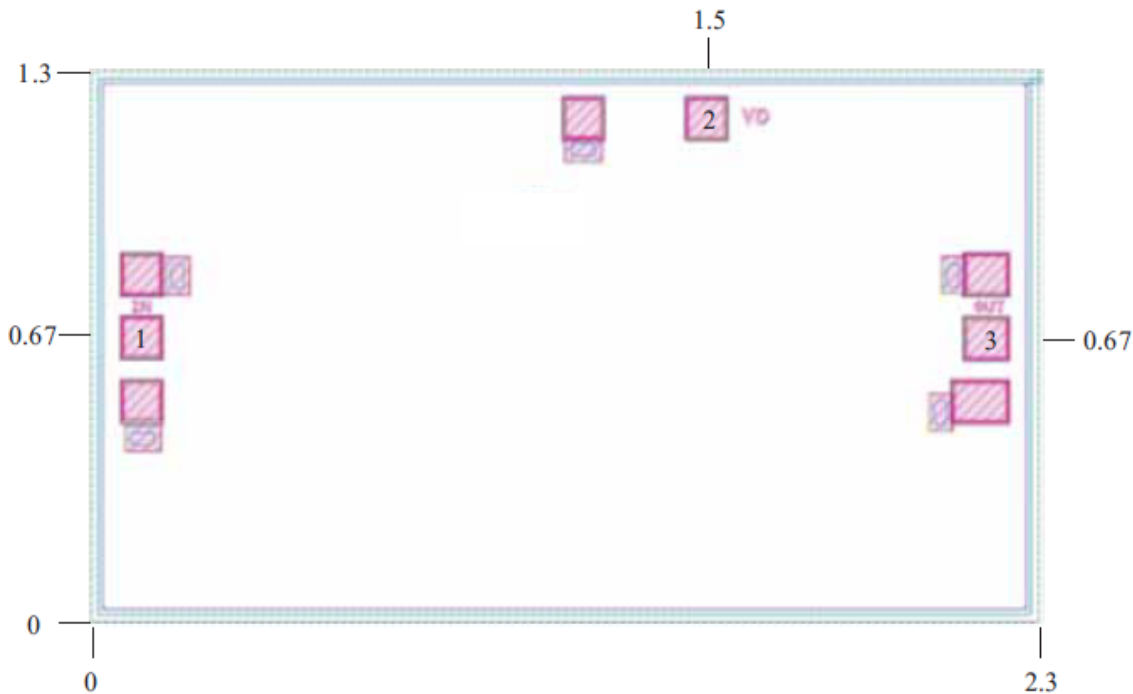


### Pad Description

PAD	Function	Description
1	IN	Input AC coupling 50Ω Impedance
2	VD	The welding disc provides the power supply voltage of the amplifier and needs to be externally connected with the 100pF by-pass capacitance.
3	OUT	Output AC coupling 50Ω Impedance
Die Bottom	GND	Die bottom must be connected to RF/DC ground



## Assembly Drawing

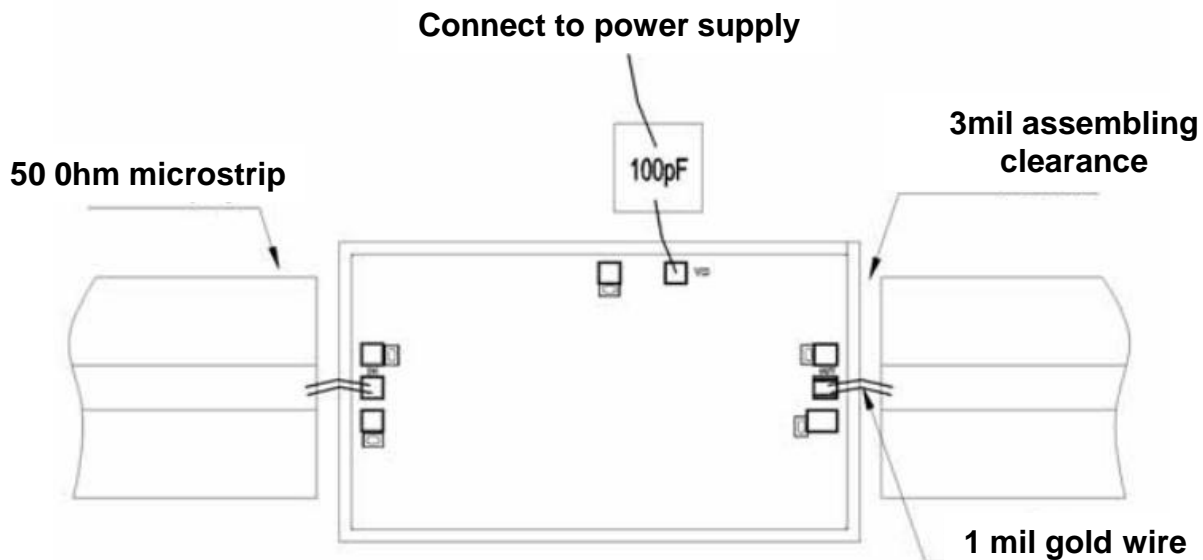

### Notes:

1. Die thickness: 100um
2. Typical bond pad is 100\*100  $\mu\text{m}^2$
3. Bond pad metalization: Gold
4. Backside metalization: Gold
5. Backside of the die (GND)
6. No connection required for unlabeled bond pads

### Maximum Ratings:

1. Power supply voltage: +6V
2. RF input power: +17dBm
3. Storage temperature: -65°C to +175°C
4. Operating temperature: -55°C to +85°C