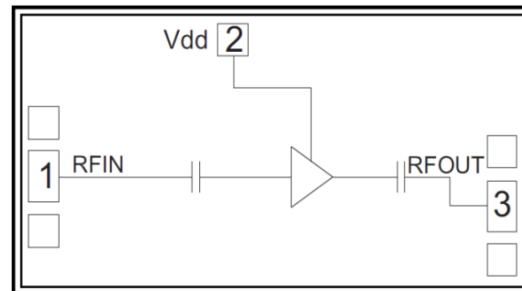


Features

- Single Biasing Voltage (Self Biased)
- Frequency: 1-18GHz
- Small Signal Gain: 15dB
- Noise Figure: 1.7 dB typ./2.1dB max.
- P1dB: 17dBm
- Power Supply: +5V/35mA
- Input/Output: 50Ω
- Die Size: 1.6 x 0.95 x 0.09 mm


Functional Block Diagram

Typical Applications

- Test Instrumentation
- Microwave Radio & VSAT
- Military & Space
- Telecom Infrastructure
- Fiber Optics


Electrical Specifications
TA = +25°C, Vd = +5V

Parameters	Min.	Typ.	Max.	Units
Frequency	1-18			GHz
Small Signal Gain	14.5	15	15.5	dB
Gain Flatness		±0.5		dB
Noise Figure	-	1.7	2.1	dB
Output 1dB Compression (P1dB)	16	17	18.5	dBm
Saturated Output Power (Psat)	18	19	19.5	dBm
Input Return Loss	13	13	-	dB
Output Return Loss	13	19	-	dB
Static current		35		mA

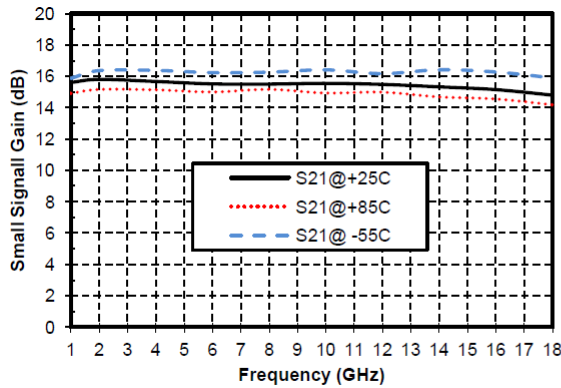
Gain vs. Frequency




Noise Figure vs. Frequency

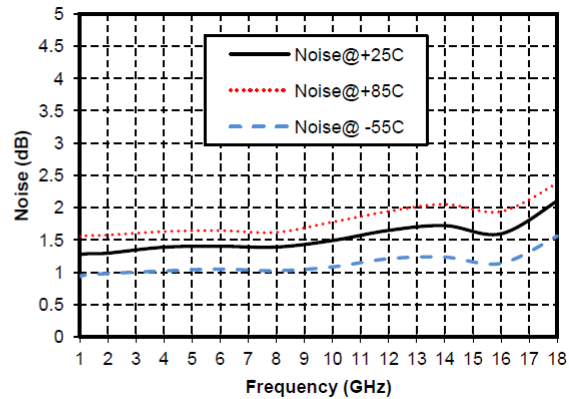


Input Return Loss vs. Frequency

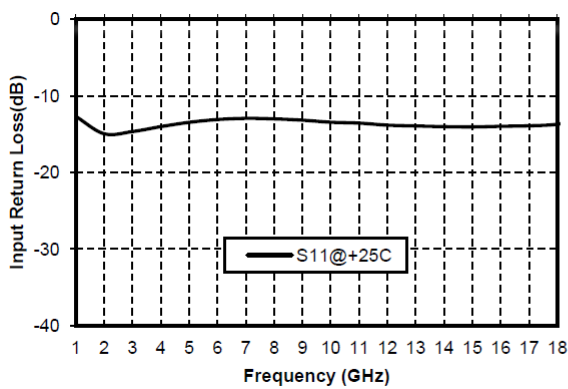


Output Return Loss vs. Frequency

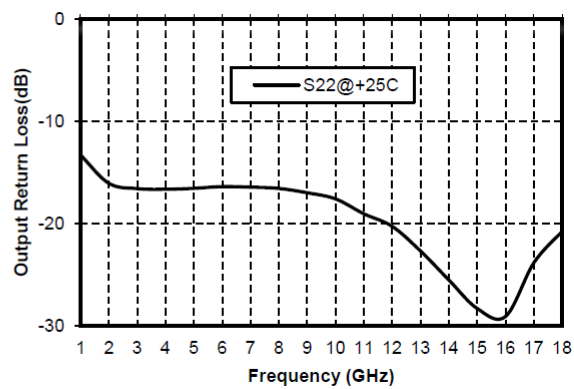

Reverse Isolation vs. Frequency

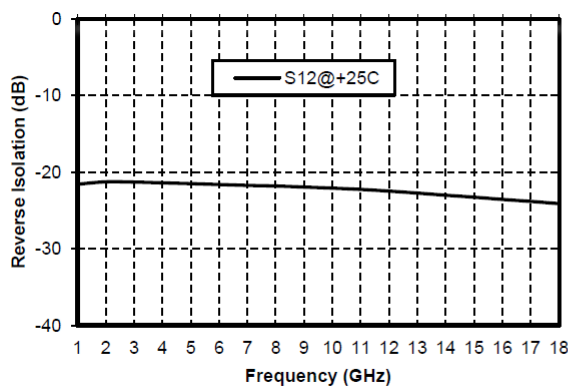


P1dB vs. Frequency

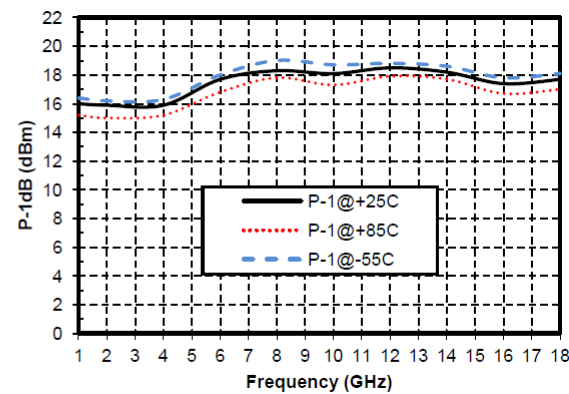



Outline Drawing:
All Dimensions in μm

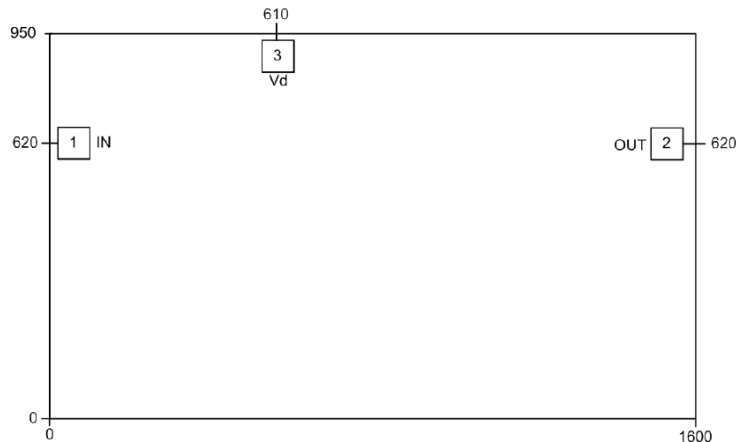


Pad Description

Pad	Function	Description	Equivalent Circuit
1	RF IN	RF signal input terminal, no blocking capacitor required.	
2	RF OUT	RF signal output terminal, no blocking capacitor required.	
3	Vd	Amplifier drain bias; external 100pF bypass capacitor required.	
Die bottom	GND	Die bottom must be connected to RF/DC ground.	



Assembly Drawing

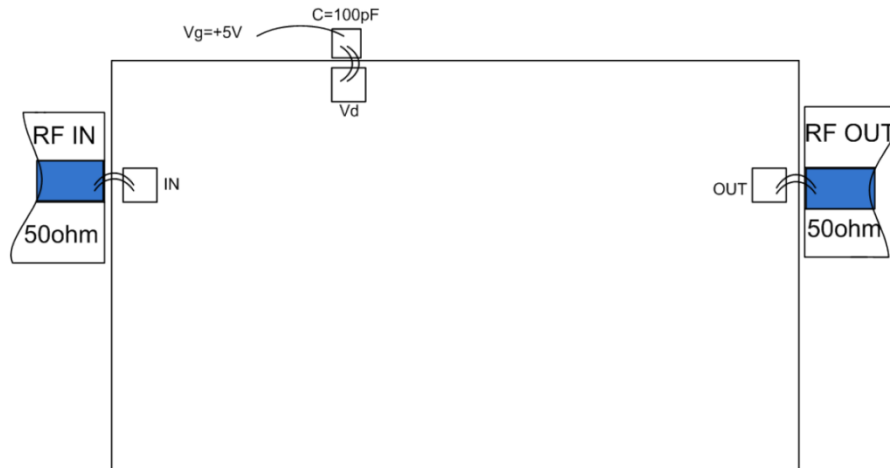

Notes:

1. Die thickness: 100um
2. Typical bond pad is 100*100 μm^2
3. Bond pad metalization: Gold
4. Backside metalization: Gold
5. Backside of the die (GND)
6. No connection required for unlabeled bond pads

Maximum Ratings:

1. Maximum drain voltage: +7V
2. Maximum input power: +20dBm
3. Operating temperature: -55°C to +85°C
4. Storage temperature: -65°C to +150°C